


LED IP65 Waterproof Par Light



USER MANUAL

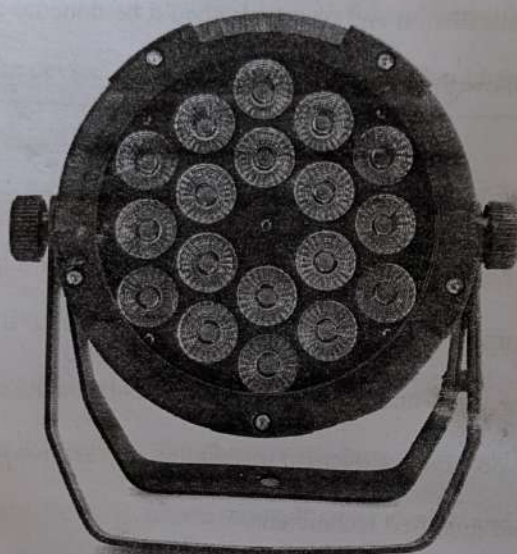

KEEP THIS MANUAL FOR FUTURE NEEDS

Thank you for your patronage. We are confident that our excellent products and service can satisfy you. For your own safety, please read this user manual carefully before installing the device.

In order to install, operate, and maintain the lighting safety correctly. We suggest that the installation and operation should be done by the verified technician and follow the instruction strictly.

Warning !

Never open the housing without disconnecting the power supply first .Certain parts may still contain a voltage!

All safety instructions and warnings relating to installation and use of this product must be observed .Electrical installation and service must be carried out by authorized and qualified technicians.

This product IP65 waterproof standard. It is forbidden to use in thunderstorm weather, and it is Prohibit the blisters ! .

Rated



max ambient temperature=40°



CAUTION!

Unplug mains lead before opening the housing.

Every person involved with the installation, operation and maintenance of this device has to:

-be qualified

-follow carefully the instructions of this manual

1. INTRODUCTION

Thank you for having chosen this professional LED Par light.

You will see you have acquired a powerful and versatile device.

Unpack the device. Inside the carton box you should find:

1. One IP65 waterproof power cable
2. One user manual
3. one pcs lights
4. one pcs IP65 waterproof DMX cable
5. two pcs bow Bracket. 2PCS Screws .

Please check carefully that there is no damage caused by transportation.

Should there be any, please consult your dealer and don't install this device.

2 Mounting and installation

2.1 Cautions: for added protection mount the fixyures in areas outside walking paths ,seating areas,or in areas were the fixture might be reached by unauthorized personnel.

Before mounting the fixture to any surface ,make sure that the installation area can hold a minimum point load of 10 times the device's weight.

Fixture installation must always be secured with a secondary safety attachment ,such as an appropriate safety cable.

Never stand directly below the device when mounting ,removing ,or servicing the fixture, from a ceiling,or set on a flat level surface .Be sure this fixture is kept at least 0.5m (1.5ft) away from any flammable (decoration etc.)

2.2 Mounting points:

Overhead mounting requires extensive experience , including amongst others calculating working load limits, a fine knowledge of the installation material being used ,and periodic safety inspection of all installation material and the fixture. If you lack these qualifications , Do not attempt the installation yourself ,improper installation can result in bodily injury.


Be sure to complete all rigging and installation procedures before connecting the main power cord to the appropriate wall outlet.

2.3 Description Of The Mownting Bracket Ste

			
Function display: LED display board and 4 switch button to select the menu. Exhaust Valve. DMX IN / DMX OUT. POWER IN / POWER OUT	When the lamp works, the glass produces water vapor. The exhaust valve discharges internal steam.	Displays DMX cable DMX out LOCK. Please operate correctly ~	Please install the corresponding interface of the cable correctly, and waterproof rubber pads ~

2.4 DMX-512 control connection

Connect the provided XLR cable to the female 3-pin XLR output of your controller and the other side to the male 3-pin XLR input of the moving head. You can chain multiple Moving head together through serial linking. The cable needed should be two core, screened cable with XLR input and output connectors. Please refer to the diagram below.

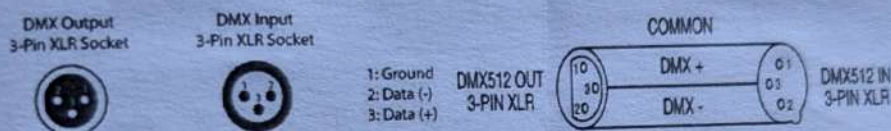

3 .TECHNICAL PARAMETERS

Input voltage: AC90-245V/50-60Hz 300

Light color: RGBWA UV 6in1

Light body material: Aluminum

Color: Black

Lens angle: 40 degrees

Color: 16.7 million kinds of color change

Control: DMX512, master-slave control, self-propelled, voice

Channel: 6/10 channels

Waterproof: IP65

Size: 27X18X26 CM

Weight: 4kg

Features:

2 frame handle, can be self-supporting, can be hung.

whole body cast, temperature protection, safe and reliable.

Unique optical system design, uniform stain results.

Ultra-high frequency (64KHz) dimmer technology, no jitter flash. N.W: 3.2KG

G.W: 5.2 KG

Packing size: 29.5*20*23cm

4 :MENU FUNCTION

KEYS INSTRUCTION



 MENU
  UP
  DOWN
  ENTER

DIGITAL SHOW FUNCTION FORM

No	Show	Function	Value	Instruction
1	d001	DMX address	001~512	6CH mode,UP,DOWN increase or reduce the value,
2	A001	DMX address	001~512	10CH mode UP,DOWN increase or reduce the value
3	r255	Red dim	000~255	UP,DOWN Change brightness
4	G255	Green dim	000~255	UP,DOWN Change brightness
5	b255	Blue dim	000~255	UP,DOWN Change brightness
6	u255	White dim	000~255	UP,DOWN Change brightness
7	y255	Amber dim	000~255	UP,DOWN Change brightness
8	P255	Ultraviolet dim	000~255	UP,DOWN Change brightness
9	FH99	Strobe	01 ~ 99	UP,DOWN change the speed
10	CL01	Colors choose	01 ~ 08	UP,DOWN Change color
11	CC99	Colors Jump	01 ~ 99	UP,DOWN change the speed
12	DE99	Colors Gradate	01 ~ 99	UP,DOWN change the speed
13	CP99	Colors Pulse	01 ~ 99	UP,DOWN change the speed
14	SU01	Colors sound-Active	01~09	UP、DOWN Change the effects

5:DMX CHANNELS

6. DMX CHANNELS

Channel	Function	Instruction
CH1	R Dimmer	Red Dimmer- Dark to Bright
CH2	G Dimmer	Green Dimmer- Dark to Bright
CH3	B Dimmer	Blue Dimmer- Dark to Bright
CH4	W Dimmer	White Dimmer- Dark to Bright
CH5	A Dimmer	Amber- Dark to Bright
CH6	U Dimmer	Ultraviolet- Dark to Bright

10.DMX CHANNELS

Channel	Function	Instruction
CH1	Total Dimmer	RGBW Total Dimmer- Dark to Bright
CH2	R Dimmer	Red Dimmer- Dark to Bright
CH3	G Dimmer	Green Dimmer- Dark to Bright
CH4	B Dimmer	Blue Dimmer- Dark to Bright
CH5	W Dimmer	White Dimmer- Dark to Bright
CH6	A Dimmer	Amber- Dark to Bright
CH7	U Dimmer	Ultraviolet- Dark to Bright
CH8	Total Strobe	RGBW Total Flash Strobe- Slow to Fast
CH9	Function Choice	000~050: CH1-CH8 Control. 051~100: Different Colors output 101~150: Colors Jump Change. 151~200: Colors Gradate. 201~250: Colors Pulse Change. 251~255: Sound-Active
CH10	Function/Speed	Slow to Fast (At the Colors output and sound choose the color)

This product can get the best results with Smoke Machine!